





L Vent

Slotvent

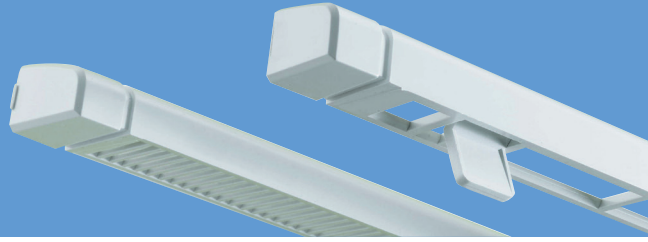


Physical specification

All measurements in millimetres unless otherwise indicated

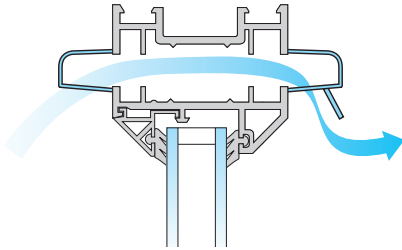

Features and benefits

- ▶ Slimline design for low profile window frames
- ▶ Up to 3200mm² equivalent area
- ▶ Bottom operation
- ▶ Small 10mm rout



2000L



4000L

Models, control options and key data

Product Code	Equivalent area (mm ²)	Slot height (mm)	Slot size (mm)		Air Permeability		Watertightness		Airborne Sound Insulation	
			Length	Central gap	Length	@ 50 Pa (m ³ /hr)	@ 50 Pa (l/s)	Pressure @ no leakage (Pa)	Classification	Dn,e,w (dB) Open
2000L	1600	10	203		5	1.38	500	E4	37	
4000L	3200	10	203	20	203	4	1.11	600	E4	34

Scottish Building Regulations: Free Area performance (see page 14 for full details)
2000L = 2000mm², 4000L = 4000mm²

Example order:

4000L + B + colour option **T**an = **4000LBT**

	Control	Colour code
2000L	B	B, BW, T, W
2000L	B	BK
2000L	B	BWIBO, BWITO, WIBKO, WIBO, WITO
4000L	B	B, BW, T, W
4000L	B	BK
4000L	B	WIBKO, WIBO, WITO