





D Vent

Slotvent




Physical specification

All measurements in millimetres unless otherwise indicated

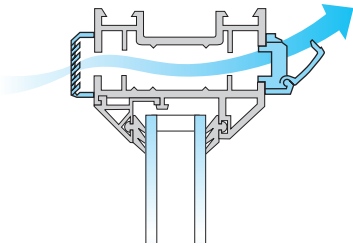

2000D



4000D

Features and benefits

- ▶ Up to 3300mm² equivalent area for through frame applications
- ▶ External louvred grille
- ▶ Upward air deflection to prevent draughts
- ▶ Discreet design provides a pleasing installed finish

Configurations

2000D & 4000D

Internal unit only

2000DF & 4000DF

Complete unit with EG Grille and front control

Models, control options and key data

Product Code	Equivalent area (mm ²)	Slot height (mm)	Slot size (mm)		Air Permeability		Watertightness		Airborne Sound Insulation	
			Length	Central Gap	@ 50 Pa (m ² /hr)	@ 50 Pa (l/s)	Pressure @ no leakage (Pa)	Classification	D _{n,e,w} (dB) Open	
2000D	-	13	165		-	-	-	-	-	
4000D	-	13	165	30	165	-	-	-	-	
2000DF	1400/1700	13/16	165		0.73	0.41	600	E4	34	
4000DF	2800/3300	13/16	165	30	165	1.0	0.27	600	E4	33

Colours available W

Scottish Building Regulations: Free Area performance (see page 14 for full details)
2000DF = 2000mm², 4000DF = 4000mm² (using 13mm rout option)

Example order:

2000D + colour option **White** = **2000DW**