





HD Vent

Slotvent




Physical specification

All measurements in millimetres unless otherwise indicated

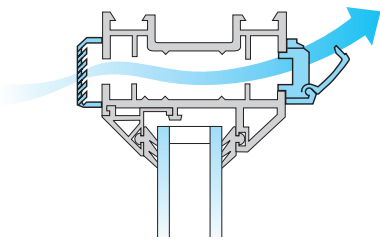

4000HD



8000HD

Features and benefits

- ▶ Up to 6800mm² equivalent area
- ▶ External louvre grille
- ▶ Upward air deflection to prevent draughts
- ▶ Designed for use on wide window profiles

Configurations

4000HD & 8000HD

Internal unit only

4000HDF & 8000HDF

Complete unit with EG Grille and front control

8000HDF

Complete unit with AEF Flyscreen and front control

Models, control options and key data

Product Code	Colour	Equivalent area (mm ²)	Slot height (mm)	Slot size (mm)			Air Permeability		Watertightness		Airborne Sound Insulation
				Length	Central Gap	Length	@ 50 Pa (m ³ /hr)	@ 50 Pa (l/s)	Pressure @ no leakage (Pa)	Classification	Dn,e,w (dB) Open
4000HD	W	–	18	235			–	–	–	–	–
8000HD	B, BW, W	–	18	235	20	235	–	–	–	–	–
4000HDF	B, BW, W	3200	18	235			2.0	0.55	500	E4	33
8000HDF	B, BW, W	6400	18	235	20	235	2.6	0.72	300	E3	31
8000HDF	W	6800	18	235	20	235	2.6	0.72	300	E3	31
				257	20	257					

Colours available W, BW, B

Scottish Building Regulations: Free Area performance (see page 14 for full details)

4000HDF = 4000mm², 8000HDF/FF = 8000mm²

Example order:

4000HDF + colour option **B**rown = **4000HDFB**