


# Elite150

## Axial flow kitchen fan



### Features and benefits

- Installation for windows and walls only, not suitable for ceiling mounting
- High quality electronically operated shutter design helping reduce unnecessary heat loss when the fan is off and enhance privacy and security in low level installations
- Top or back cable entry for simple cost effective installation
- Modern styling for discreet finish
- Axial impellor flat surface design that does not clog easily helping to maintain installed performance
- Window kits on page 50

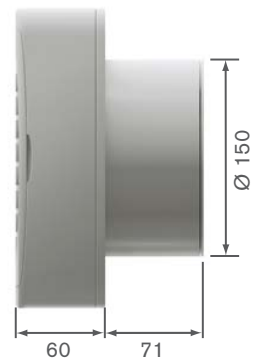

### Models, control options and key data

\*Sound pressure level measured @ 3 metres

Product code	Control operation	Voltage	IP	Performance		Sound pressure dB(A)*	Price ex. VAT (£)
				m <sup>3</sup> /h	l/s		
EL150PC	Single speed with pullcord	230	X4	266	73	44	£76.36
EL150HTR	Single speed with humidistat/timer & remote operation	230	X4	266	73	44	£115.86

### Physical specification

All measurements in millimetres unless otherwise indicated

**Weight:** 0.98kg

**Materials:** White satin finish  
ABS Plastic

- Ancillaries for Elite 150**
- EW150 page 50
  - ED150 Easyfix page 48
  - Flexiduct page 48
  - EG2 page 48
  - GG84 page 49

### Installation

**Wiring:** Must comply with IEE Regulations

**Cable:** Ø 1mm<sup>2</sup> max

**Fuse:** 3 amp normally required (when fan is supplied from a 6A lighting circuit no local fuse is required)

**Exhaust:** Ø 150mm

**Glazing hole:** Ø 167mm, 4–28mm double glazing

**Electrical specification:** 230V–50Hz Class II

**Consumption:** 25W – EL150 range  
26W – EL150HTR

### Performance

