



Samika LE150

Low energy adaptive extraction for kitchens and utility rooms



Features and benefits

- ø150mm axial fan kitchen and utility room applications. Ceiling mounting for Utility mode only and discharge via external wall or soffit not via the roof
- Wall mounted only in kitchen mode
- Two models with varying controls including SMART timer and humidity
- Greenwood CommissionSMART™ - adaptive installed performance set up at the touch of a button!
- Secure and robust window kit designed in conjunction with social housing landlords
- Soft closing anti-backdraught shutters to prevent nuisance noise when the fan is not in use (remove for ceiling applications)
- Integral pullcord on all models

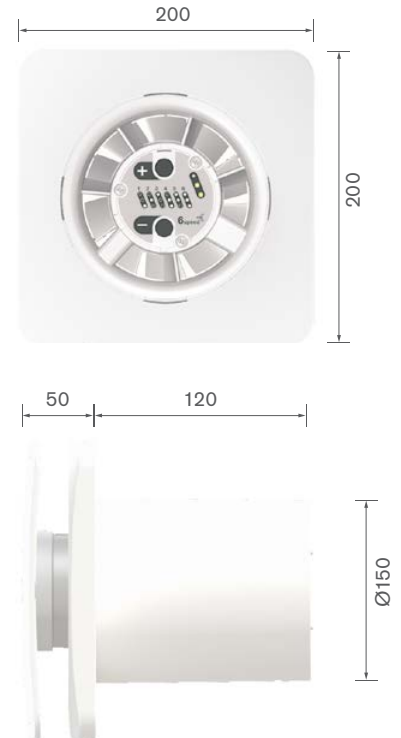

Greenwood SMART Technology



Models, control options and key data

*Sound pressure level measured @ 3 metres

Product code	Control operation	Voltage	IP	Performance (l/s)		Sound Pressure Level dB(A)*		Energy Consumption (W)		Price ex. VAT (£)
				Utility	Kitchen	min	max	min	max	
LE150PC	Single speed with pullcord	230	X4	30	60	29	47.5	3	12.3	£127.19
LE150HT	Single speed with SMART humidistat & timer	230	X4	30	60	29	47.5	3	12.0	£147.11

Physical specification

All measurements in millimetres unless otherwise indicated

Weight: 1.2kg

Materials: White satin finish
ABS Plastic

Ancillaries for Samika LE150

ED150 Easyfix page 48 • Flexiduct page 48
• EG2 page 49 • GG84 page 49 • EWLE150 page 50

Installation

Wiring: Must comply with IEE Regulations

Cable: Ø 2 core 1mm² max
Ø 3 core 1.5mm² max

Fuse: 3 amp normally required (when fan is supplied from a 6A lighting circuit no local fuse is required)

Exhaust: Ø 150mm

Electrical specification: 220–240V–50Hz Class II
SELV 24DC Class III

Glazing: Suitable for 4–28mm
LE150 glazing hole Ø 167mm

Performance

