

# CD

## Flat roof fans





### Flat Roof Fan Kit Specification Components - For Full Kit

Size	Fan	Price ex. VAT	Wall Spacer	Price ex. VAT	Roof Terminal	Price ex. VAT
6" Flat Roof Kit	CD6	£350.62	WS6	£38.57	RT6	£323.80
9" Flat Roof Kit	CD9	£382.53	WS9	£49.02	RT9	£361.79
12" Flat Roof Kit	CD12	£414.95	WS12	£60.26	RT12	£414.26

### Features and benefits

- Reversible supply or extract, variable speed operation
- Thermo-actuated backdraught shutters ensures silent operation and positive closure when fan is off
- Choice of controllers, remote and integral sensors
- 6", 9" and 12" models available

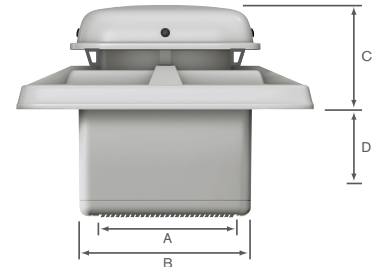

	6"	9"	12"
A min	400	400	500
B	600	600	695
C	235	245	266
D min	150	150	150

### Models, control options and key data

\*Sound pressure level measured @ 3 metres \*\*See components table above Note: figures are extract only

Product code		Performance to BS 848 Pt1 in free air (m <sup>3</sup> /h)		Sound pressure level dB(A)*		Consumption (W)	
		Boost	Eco	Boost	Eco	Boost	Eco
CD6	6" commercial fan - installed within a flat roof kit specification**	394	202	47	30	38	20
CD9	9" commercial fan - installed within a flat roof kit specification**	700	597	48	44	50	37
CD12	12" commercial fan - installed within a flat roof kit specification**	1149	775	48	32	100	70

FOR SINGLE PRICE FAN PLEASE REFER TO PAGE 30

### Physical specification for complete CD flat roof fan kit

All measurements in millimetres unless otherwise indicated

**Weight:** 6.15kg  
9.10kg  
11.0kg

**Materials:** ABS plastic

#### Ancillaries for CD

For details of remote or integral sensor options/ switches see page 39. For full kit accessories WS6, WS9, WS12, RT6, RT9, RT12 see page 40.

### Installation

**Wiring:** Must comply with IEE Regulations

**Cable:** Ø 1mm<sup>2</sup> max or min

**Fuse:** 3 amp (when fan is supplied from a 6A lighting circuit no local fuse is required)

**Electrical specification:** 230V-50Hz Class I

**Consumption:** Boost = 38W, Eco = 20W  
Boost = 50W, Eco = 37W  
Boost = 100W, Eco = 70W

### Performance

