

Window kits

Safe, secure and more

Materials

ASA and polycarbonate

Secured by Design




Police Preferred Specification



Omnique window kit is part of the Secured by Design (OP100SBD) bundle featured on pages 37,39, 59 and 61.



Samika window kit

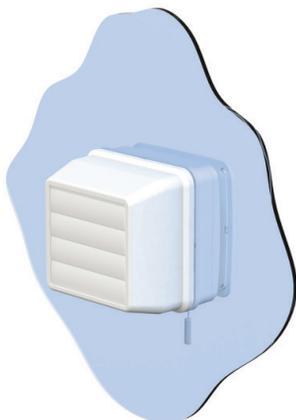

The best choice for windows

Secure extractor fan installations are crucial in window applications as they may be targeted as a means to gain access to a property.

Following consultation with Local Authorities, Housing Associations and those responsible for secure designs in housing, we offer a unique window kit with a dual-layered secure design and manufactured from a mix of durable materials.

Features and benefits

- The fans screw directly onto the internal fixing plate, enhancing the overall security of the whole product
- Rubber 'O' ring seals ensure that the product sits tight to the window, preventing scratching or damage to the glass
- Extremely versatile, these secure window kits can be installed through thicker glazing with longer countersunk screws (up to 28mm double glazing)
- The external cowls offer long-term quality assurance – they are manufactured from UV stabilised ASA material

Omnique specific benefits

- Unique grille design minimises backdraught helping to reduce heat loss in homes
- Solid front fascia design provides privacy for occupant once installed

Samika specific benefits

- Angled edge design helps deflect any external impact forces
- Louvered shutters prevent any backdraught, and their soft closing designs mean no 'clackety-clack' nuisance noise

Extra secure design

The dual-layered secure design is driven from the use of two polycarbonate fixing plates (the same material used in hard hats) one on the outside attached to the external cowl and one on the inside attached to your chosen fan. A 'sandwich' effect is created around the glass, helping add extra strength to the entire installation as the product is secured from inside to outside through the glass. In the event that the cowl is forced off, the polycarbonate external fixing plate will remain fixed to the window offering no further opportunity for access by potential intruders.

Window kit models and key data

Product code	Fits with	Ø Glazing hole (mm)	Glazing thickness (mm)	Width (mm)	Height (mm)	Depth (mm)	Weight (Kg)
EWLE100	Samika LE100	118	up to 28	167	167	86	0.5
EWLE150	Samika LE150	167	up to 28	207	207	86	0.8
EW100	Elite EL100	118	up to 28	150	150	60	0.2
EW150	Elite EL150	167	up to 28	200	200	75	0.3